


**NOTES**

- DRAINAGE WATER FLOW CANNOT BE BLOCKED.
- STONE OR HARDWARE SURFACE PARKING AREAS WILL NOT BE MAINTAINED BY THE VILLAGE.
- VEHICLES CANNOT BE PARKED OVER OR ACROSS SIDEWALKS.
- VEHICLES CANNOT BE PARKED PROTRUDING INTO THE PAVED PORTION OF THE STREET.
- THE MINIMUM ALLOWABLE PARKING WIDTH IS TEN FEET.
- THE VILLAGE RESERVES THE RIGHT TO DENY ANY REQUEST FOR RIGHT-OF-WAY PARKING DUE TO SIGHT HAZARDS, UTILITY PITS OR SHUTOFFS, DRAINAGE ISSUES OR OTHER EXTENUATING CIRCUMSTANCES.
- A DRAWING IS REQUIRED AT THE TIME THE RIGHT-OF-WAY PERMIT IS APPLIED FOR SHOWING EVERYTHING WITHIN THE RIGHT-OF-WAY.
- IF THIS PARKING AREA IS NOT PROPERLY MAINTAINED BY THE PROPERTY OWNER, THE VILLAGE CAN MAINTAIN THE AREA AND BILL THE PROPERTY OWNER, IMPROPER MAINTENANCE OF THIS AREA CAN CAUSE THIS STREET TO DETERIORATE MUCH FASTER.
- THIS PARKING AREA IS NOT THE PROPERTY OWNER'S PRIVATE PARKING. THIS AREA IS ON STREET RIGHT-OF-WAY ALLOWING ANYONE TO PARK IN THIS AREA.
- SNOW REMOVAL IN THIS AREA IS NOT THE RESPONSIBILITY OF THE VILLAGE.
- THE VILLAGE RESERVES THE RIGHT TO PROHIBIT PARKING WITHIN ANY RIGHT-OF-WAY IF CIRCUMSTANCES WARRANT SUCH A CHANGE.
- VEHICLES PARKED WITHIN THIS AREA ARE SUBJECT TO ALL PARKING REGULATIONS.

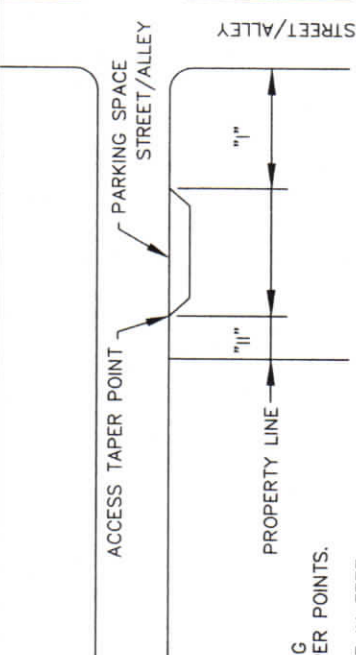

MINIMUM SPACING OF ACCESS TAPER POINTS.

ITEM	DISTANCE IN FEET
I.	25
II.	5

**ACCESS CONTROL STANDARDS**

- A.** PARKING SPACES AS SHOWN SHALL APPLY TO ALL NON CURBED ALLEYS, LOCAL, OR COLLECTOR STREETS WITHIN THE VILLAGE. PARKING SPACES ARE PROHIBITED ON ARTERIAL STREETS.
- B.** THE DISTANCE FROM PARKING SPACE AND RELEVANT ITEM SHALL BE MEASURED TO THE NEAREST STREET, EDGE LINE, OR PROPERTY LINE.
- C.** NO MORE THAN ONE (1) ACCESS FOR PARKING SPOTS PER PROPERTY IS PERMITTED WITH THE EXCEPTION THAT AN ACCESS POINT ON EACH ROADWAY OF A CORNER PROPERTY IS PERMITTED.
- D.** IN SPECIAL OR UNIQUE SITUATIONS WHERE STRICT APPLICATION OF THESE STANDARDS WOULD CAUSE UNDUE HARDSHIP UPON THE PROPERTY OWNER, THE VILLAGE ADMINISTRATOR MAY GRANT A VARIANCE TO SAID STANDARDS.
- E.** AN ACCESS TAPER POINT MUST BE AT MINIMUM 25' FROM THE NEAREST EDGE OF PAVEMENT ON STREETS.
- F.** AN ACCESS TAPER POINT MUST BE AT MINIMUM 5' FROM THE ADJACENT PROPERTY LINE.
- G.** ALL DEFINITIONS SHALL BE AS PER THE OHIO MANUAL OF UNIFORM TRAFFIC DEVICES LATEST REVISIONS.
- H.** ALL PARKING SPACES ALONG VILLAGE STREETS AND ALLEYS MUST BE APPROVED BY THE VILLAGE, PRIOR TO ANY WORK BEING PERFORMED, RIGHT-OF-WAY PERMIT IS REQUIRED.

VILLAGE OF ADA  
CHOICE ONE ENGINEERING

**PARKING SPACE / ACCESS POINTS ALONG VILLAGE STREETS AND ALLEYS**

REVISIONS:	DATE
	APPROVED: MAY 2011
	PAGE No. 300-29