


- (1) ITEM SPECIAL, BRICK PAVING, CURB RAMP (2-1/4" BRICK)
- ③ ITEM 608, 8" CONCRETE UNDERLAYMENT, CURE & SEAL WITH ONE COAT OF SUPER DIAMOND CLEAR
- (4) ITEM 411, 8" AGGREGATE BASE SATURATE W/ WATER PRIOR TO COMPACTION
- (5) ITEM 204, SUBGRADE COMPACTION
- (6) ITEM 407, TACK COAT @ 0.10 GAL/S.Y.
- TRUNCATED DOMES (2 1/4" BRICK)
- (8) NEOPRENE MODIFIED ASPHALT ADHESIVE
- BRICK TYPICAL SECTION AT CURB RAMPS

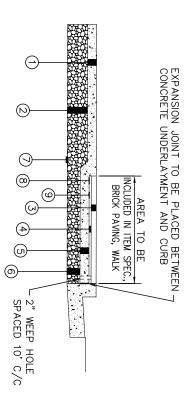

- ① ITEM 608, 5" CONCRETE WALK, AS PER PLAN APPLY 2 COATS OF SUPER DIAMOND CLEAR CURING AND SEALING COMPOUND, OR APPROVED EQUIVALENT PER MANUFACTURER'S RECOMMENDATION ON ALL SURFACES INCLUDING BACK IMMEDIATELY AFTER FINISHING SURFACES.
- 2 ITEM 411, 8" AGGREGATE BASE, (IN 2 EQUAL 4" LIFTS), SATURATED W/ WATER PRIOR TO COMPACTION
- (4) 3/4" ROLLED BITUMINOUS SETTING BED. (REFER TO VILLAGE FOR SPECIFICATIONS)
- (S) ITEM 608, 4" CONCRETE UNDERLAYMENT, CURE & SEAL WITH ONE COAT OF SUPER DIAMOND CLEAR.
- 6 ITEM 411, 5-3/4" AGGREGATE BASE SATURATE W/ WATER PRIOR TO COMPACTION
- (7) ITEM 204, SUBGRADE COMPACTION
- (8) ITEM 407, TACK COAT (9) 0.10 GAL/S.Y. NOPRENE MODIFIED ASPHALT ADHESIVE.
- NEOPRENE MODIFIED ASPHALT ADHESIVE.

BRICK TYPICAL SECTION

(REFER TO SPECIFICATIONS)

VILLAGE OF

ENGINEERING

LAYING COURSE TYPICAL SECTIONS

REVISIONS: DATE APPROVED: JUNE 2006

PAGE No.

300-2