



BALE INLET FILTER

NOTES

A. THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE THE INLET DRAINS A RELATIVELY FLAT AREA (SLOPES NO GREATER THEN 5%) WHERE SHEET OR OVERLAND FLOWS (NOT EXCEEDING 0.5 CFS) ARE TYPICAL.

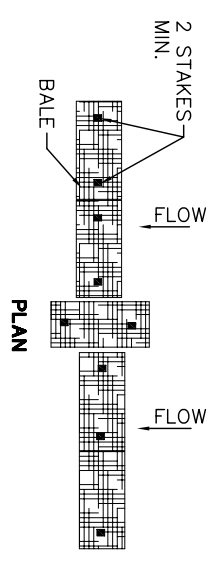

TIGHTLY PACKED STRAW OR HAY
 BOTTOM OF END BALES HIGHER THAN TOP OF CENTER BALE.

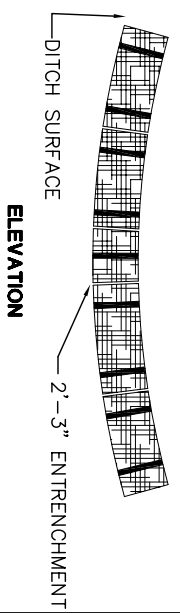

BALE DITCH CHECK

NOTES

A. PLACEMENT OF BALES SHALL BE TIGHTLY PLACED, ADJACENTLY, AND ENTRENCHED 2" AND 3" BEFORE STAKING AND A SMALL AMOUNT OF LOOSE SOIL SHALL BE LIGHTLY COMPACTED ALONG THE UPSTREAM EDGE OF THE BALES.

B. EACH BALE SHALL BE FIRMLY STAKED WITH A MINIMUM OF 2 STAKES AT LEAST 3' IN LENGTH. STAKE SHALL BE WOODEN 2" X 2", REINFORCING BARS OR FENCE POST, AS APPROVED BY THE VILLAGE.

C. LOOSE STRAW OR HAY SHALL BE SCATTERED FOR A DISTANCE OF 10' ON THE UPSTREAM SIDE OF EACH DITCH CHECK, AND SHALL BE WEDGED BETWEEN AND UNDER STAKED BALES.

VILLAGE OF
 ADA



**STRAW OR HAY BALES
 TEMPORARY EROSION CONTROL**

REVISIONS:
 AUG. 1999

DATE APPROVED:
 MAY 1997

PAGE No.
 600-12